




IL VOSTRO PARTNER PER L'IMBALLAGGIO


F105 / PS50T/B

Semi Automatic Case Erectors

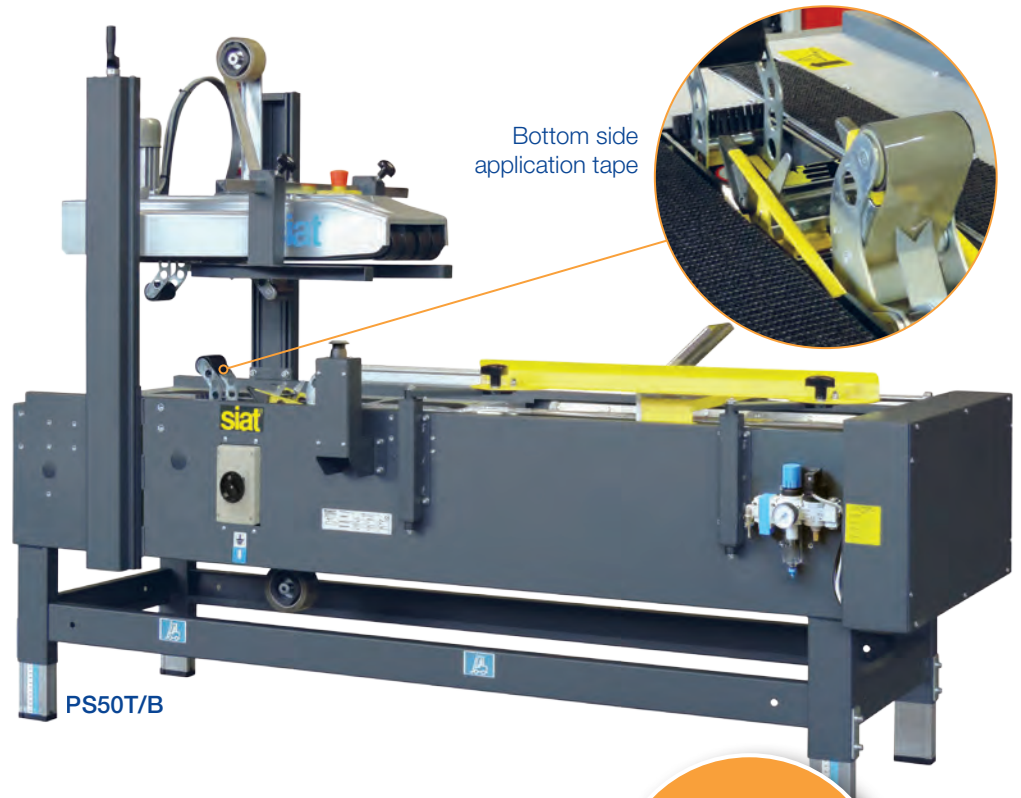


Bottom side
application tape

PS50T/B

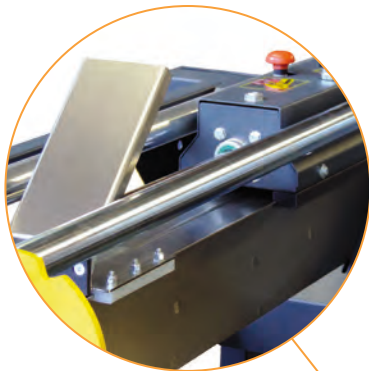

Detail of the NEW pusher

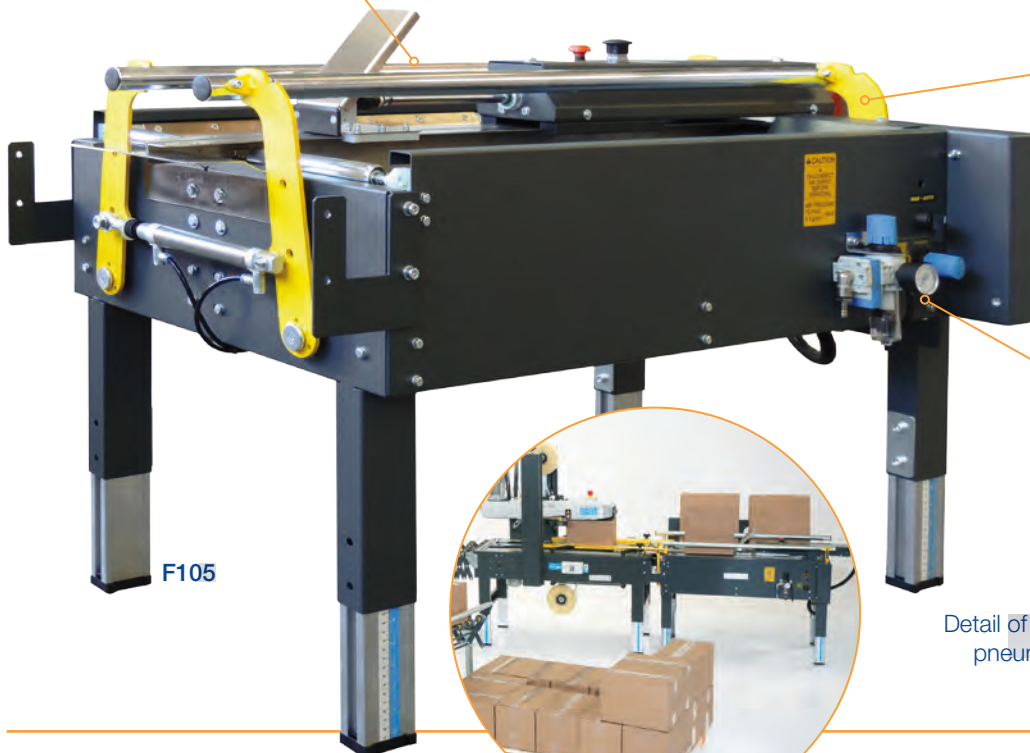

F105

New F105
Standard features are:
minimum width &
height manageable
now is 90mm!!



Detail of the NEW
pneumatic unit




The case former folds the bottom flaps of boxes entered into machine by an operator, allowing a time saving of 50%.


The F105 case former machine automatically folds the bottom flaps of the box manually entered by an operator. The box with the bottom flaps folded remains in vertical position for filling operation. Subsequently it could be pushed through a pneumatic cylinder in a "Fixed Format" case sealer machine for sealing with adhesive tape.

other languages: www.siat.com

> F105

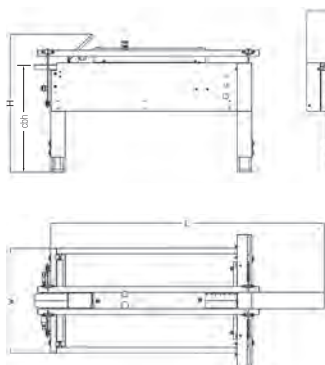

> PS50T/B

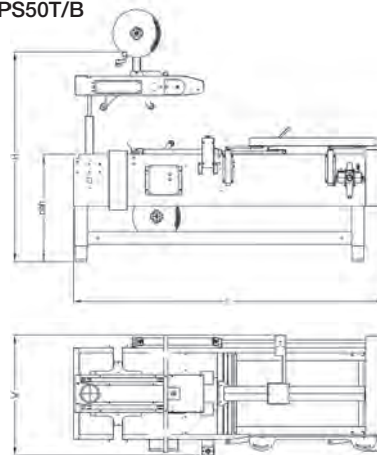

> Machine dimensions
Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de la máquina

Size / Weight packaging			LxWxH
> F105	110	125	148x88x95
> PS50	225	250	202x83x126


> F105

	Min.	Max
L	1120	1620
W	570	720
H	700	850
cbh	480	630
AS 77	780	930
AS 80	900	1050


> PS50T/B

	Min.	Max
L	1952	-
W	753	-
H	1305	1505
cbh	585	785
AS 77	685	885
AS 80	785	985

> Taping units
Unità nastranti
Verschliesseinheiten
Unité enrubanneuse
Unidades de precinto



> Box dimensions
Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de las cajas



> F105


	Min.	Max
l	200	600
w	90	500
h	90	500

> PS50T/B

	K11R	
	Min.	Max
l	150	600
w	150	600
h	100	500

	K11R
	mm
A	410 Max
B	50
C	76

> Production capacity
Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> F105


	Bph
Max pcs.*	600

> PS50T/B

	Bph
Max pcs.*	600

* Always based on shorter manageable box

> Air consumption
Consumo aria
Druckluftverbrauch
Consommation air comprimé
Consumo de arie



> F105 / PS50T/B


	NL
Cycle	14,2

from 5,5 bar to 7 bar

> PS50T/B


380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + N + PE

> Standard voltage
Voltage standard
Standardspannung
Tension standard
Voltage estándar




> Optionals
Accessori
Zubehör
Accessories
Accesorios

> AS80
Higher legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Patas más altas



> AS77
Casters
Set ruote
Rädchen
Roulettes
Ruedas



> RG
Roller conveyor
Piani a rulli
Rollenbahnen
Plans à rouleaux
Rodillos libres



> GTL - GTR
Extendable conveyor
Rulliera estensibile
Ausziehbare rollenbahnen
Convoyeur extensible
Rodillos extensibles

